


## Reversing Lamps



| ORDERING NUMBER | FIG. | PRICE | DETAILS  | BULBS REQUIRED   |
|-----------------|------|-------|--|--|
| KZR 9/13 CC     | 14   |       | REVERSING LAMP WITH NUMBERPLATE LAMP. 80 x 25 mm (3 1/8" x 1") light aperture. All chrome-plated. Fitted above the numberplate. Suitable for vertical or slightly curved body surfaces. Size 306 x 56 mm (12 1/16" x 2 3/16"). Two fixing screws with 5 mm metric thread at 284 mm (11 3/16") centres. | Reversing:<br>E 625<br>E 1225<br>E 2425<br>[BA 15 s]<br>Numberplate:<br>2 x 6 610<br>2 x 6 1210<br>2 x 6 2945<br>[BA 15 s] |

The use of Speedo-Mounted Reversing Lamp Switches (see under "Switches") enables these lamps to be automatically switched on when the vehicle begins to reverse.

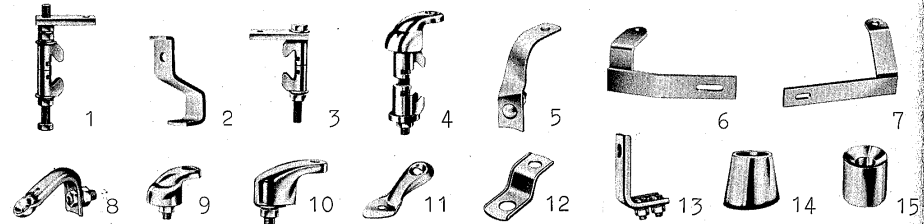

### Fog Lamp Brackets


|                |    |  |
|----------------|----|--|
| 16/73          | 1  | Standard model. Fitted to bumper supports ranging from 35 to 80 mm (1 3/8" to 3 1/4") in width.                                |
| 16/75          | 3  | Standard model. Fitted to bumper supports ranging from 35 to 50 mm (1 3/8" to 2") in width.                                    |
| 16/57          | 4  | As 16/75 but with special metal flange of highly-polished finish.  |
| 16/82          | 9  | Flange with screw. Made of highly-polished metal. Fitted to horizontal body surfaces.  |
| 16/74          | 10 | As 16/82 but heavy-duty model.   |
| 16/191         | 8  | Fitted to the mudwing or inclined body surfaces by means of hollow screw for cable entry. Suitable for smaller type fog lamps. |
| 16/213         | 15 | Intermediate piece. Fitted directly to horizontal body surfaces.   |
| 16/120         | 14 | As 16/213 but fitted to inclined body surfaces.  |
| 16/194 r.or l. | 6  | Fitted to the rear of bumper. Particularly suitable for Volkswagen cars.   |

### Reversing Lamp Brackets

|        |    |   |
|--------|----|---|
| 16/127 | 13 | Fitted to the vehicle body.   |
| 16/162 | 5  | Fitted to the bumper. Suitable for Volkswagen cars.                                       |
| 16/163 | 12 | Fitted to horizontal body surfaces.   |
| 16/176 | 2  | Fitted to the bumper. Suitable for NSU-Prinz III.   |
| 16/187 | 11 | Fitted to the mudwing.  |
| 16/191 | 8  | Fitted to the mudwing or inclined body surfaces by means of hollow screw for cable entry. |
| 16/220 | 7  | Fitted to the bumper support. Suitable for DKW-Junior.                                    |



## Long-Range Driving & Spot Lamps

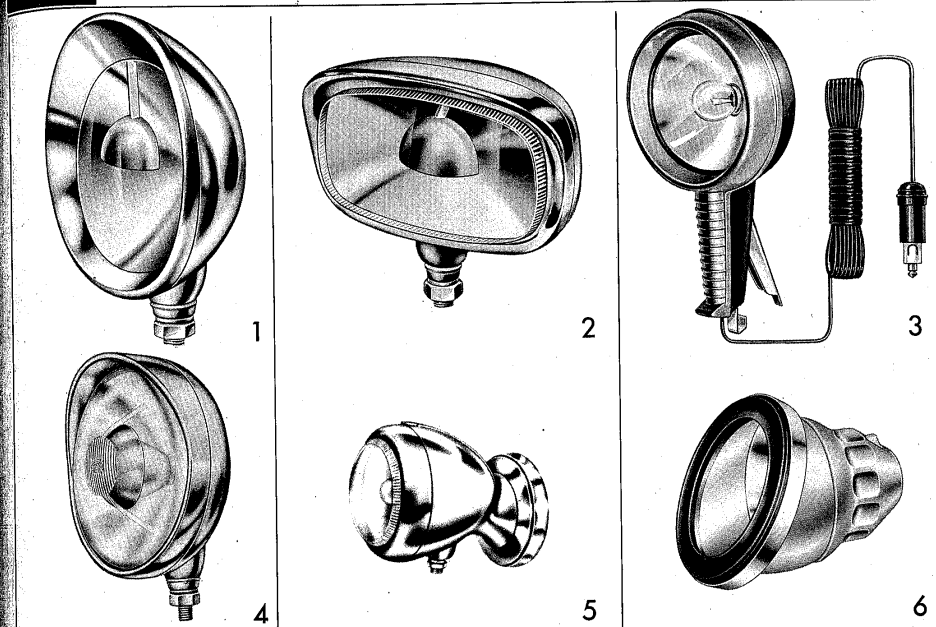

| ORDERING NUMBER | FIG. | PRICE | DETAILS   | BULBS REQUIRED                         |
|-----------------|------|-------|---|--|
| 127 ZF CC       | 2    |       | LONG-RANGE DRIVING LAMP. 123 x 70 mm (4 7/8" x 2 3/4") light aperture. All chrome-plated. Clear, non-fluted lens for far-reaching beam. Shallow body. Cable enters through hollow screw (10 mm metric thread).  | D 650<br>D 1250<br>D 2450<br>[BA 20 s] |
| 124 ZF CC       | 1    |       | LONG-RANGE DRIVING LAMP. 110 mm (4 5/16") light aperture. All chrome-plated. Clear, non-fluted lens for far-reaching beam. Shallow body for easy fitment. Adjustable ball-type base with hollow screw (10 mm metric thread). Cable enters through hollow screw. |  |
| 120 ZF CC       | 4    |       | LONG-RANGE DRIVING LAMP. 120 mm (4 3/4") light aperture. All chrome-plated. Clear, non-fluted lens for far-reaching beam. Hooded lens-retaining rim. Adjustable ball-type base with solid screw (10 mm metric thread).  | D 645 L<br>D 1245 L<br>[BA 20 s]       |
| 80/140-1 CC     | 5    |       | SPOTLAMP. 80 mm (3 1/8") light aperture. All chrome-plated. Control grip with rear-view mirror is designed as a switch. (16/173 bracket should be ordered separately).  | E 625<br>E 1225<br>E 2425<br>[BA 15 s] |
| 117/4           | 6    |       | ADHESIVE TYPE INTERIOR SPOTLAMP. 70 mm (2 3/4") light aperture. Ivory coloured. Suitable for plane or curved windcreens. Supplied with 1 m (40") long cable. If removed from the rubber suction plate, the lamp may be used as an inspection light.             |  |
| 100/75          | 3    |       | HAND SPOT LAMP. 100 mm (4") light aperture. All plastic material. Grip incorporates on-off switch. With 7.5 m (24' 7") long cable and 12/1 B plug. (For plug-sockets see under "Installation Material").  |  |